




Sony Ericsson K750i Back Casing Replacement

Follow these steps to remove the back casing of the phone and access internal components for removal or replacement.

Written By: Abby Evers

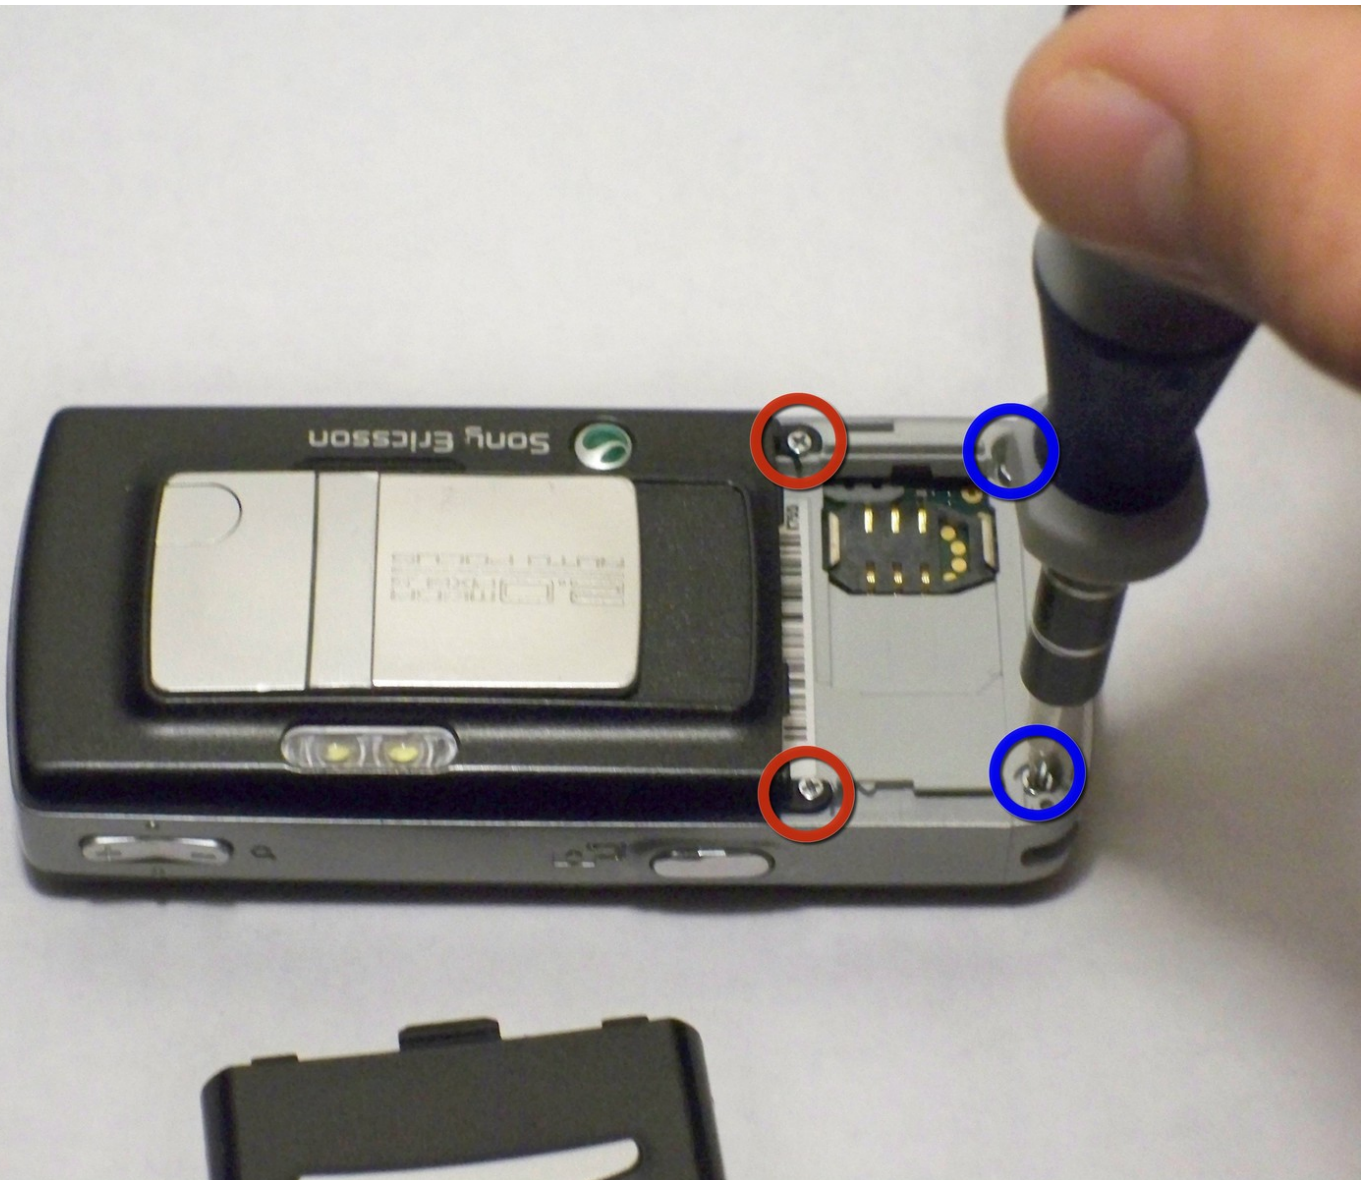



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)

or small shim for prying

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery Cover




- Remove battery cover
- Press down firmly with thumb and slide cover back

Step 2 — Back Casing




- Remove 4 screws from battery chamber
- Red - Phillips 0 screwdriver
- Blue - Torx 6 screwdriver

Step 3

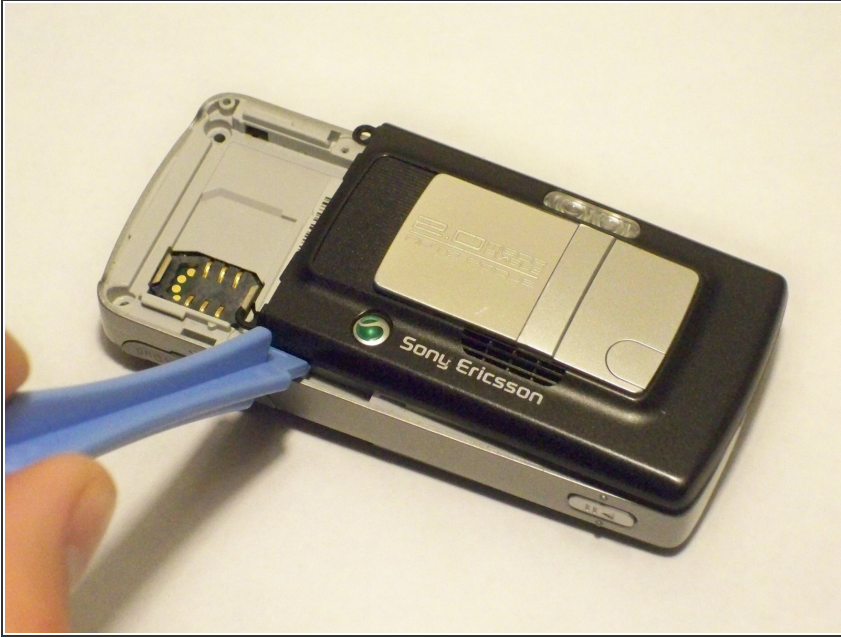

- Gently pry off back casing
- **Note:** work shim or flathead screwdriver around entire seam before attempting to pull off casing. This will reduce the chance of cracking the casing.

Step 4

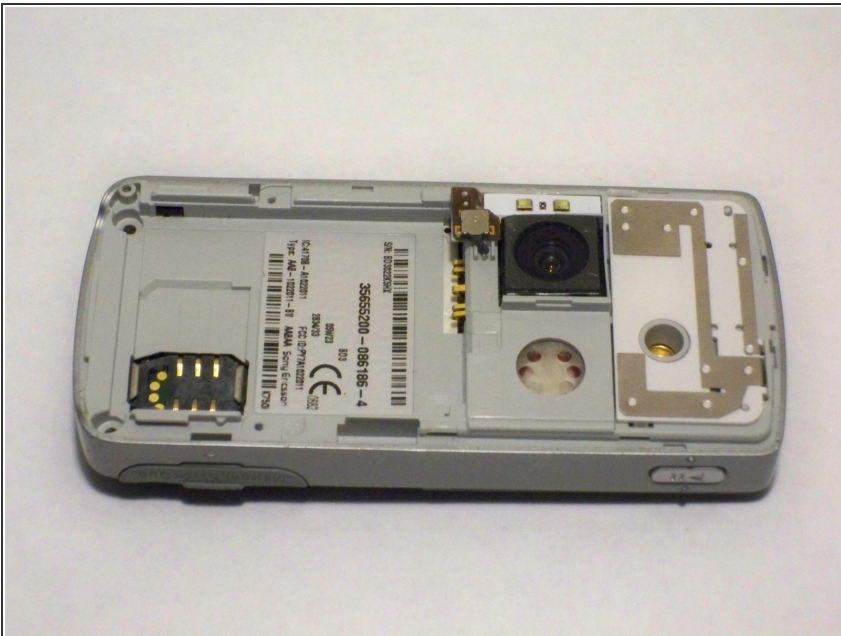

- Remove casing to expose camera components

To reassemble your device, follow these instructions in reverse order.